

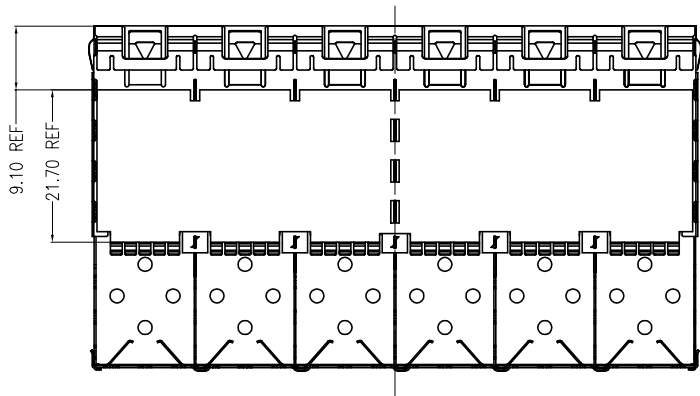
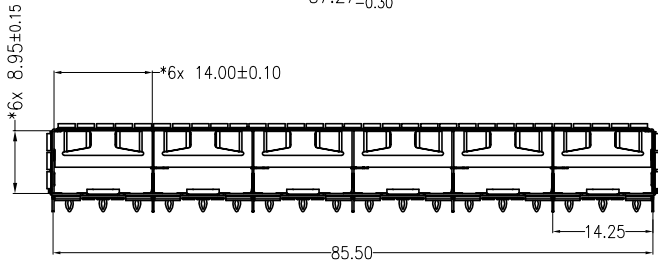
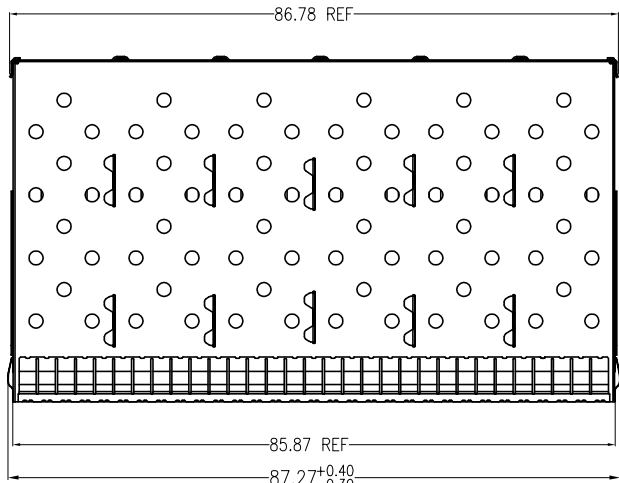
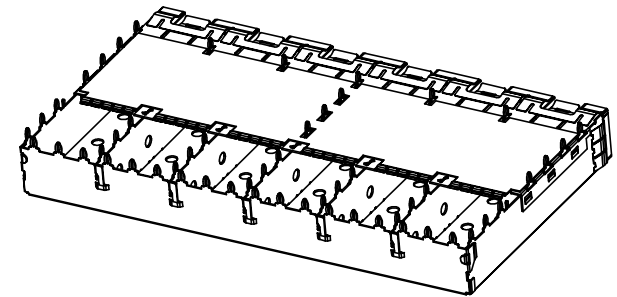



Customer drawings

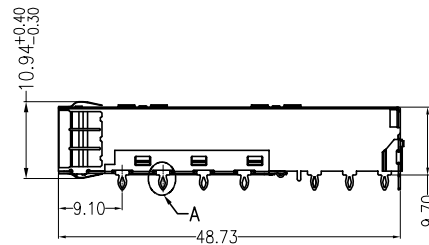


NOTE:

- | 1, DESCRIPTION | Q'ty | MATERIAL | PLATING |
|--------------------|------|---------------------|-----------------|
| TOP CAGE | 1PCS | SUS T=0.25 | N/A |
| BOTTOM CAGE | 1PCS | COPPER ALLOY T=0.25 | N/A |
| MID CAGE | 5PCS | SUS T=0.25 | N/A |
| KICKOUT SPRING | 1PCS | SUS T=0.20 | N/A |
| MYLAR | 1PCS | PI T=0.18 | N/A |
| EMI SPRING(top) | 1PCS | COPPER ALLOY T=0.06 | TIN OVER NICKEL |
| EMI SPRING(side) | 2PCS | COPPER ALLOY T=0.06 | TIN OVER NICKEL |
| EMI SRPING(bottom) | 1PCS | COPPER ALLOY T=0.08 | TIN OVER NICKEL |
- 2, TEMPERATURE:
 OPERATION: -40°C~+85°C
 STORAGE: -20°C~+70°C

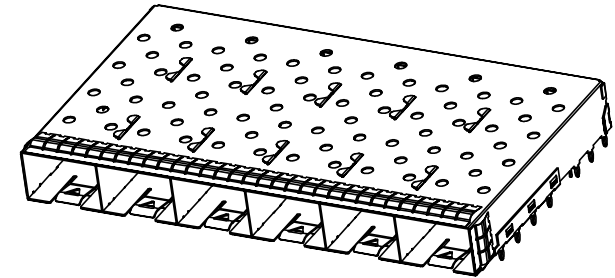

A	NEW RELEASE	Shmily	
版次	修改说明	ECN 编号	核准

自由公差		设计	2017.06.21	深圳市益晟康科技有限公司 ETLINK SHENZHEN ETLINK TECHNOLOGY CO.,LTD
长度尺寸	角度尺寸			
X, ±0.25	X°, ±0.5°	Parker		品名 SFP*1x6 CAGE 带MYLAR
.X, ±0.25	.X°, ±0.5°	审核 Linson	2017.06.21	
.XX, ±0.20	.XX°, ±0.5°	核准 Shmily	2017.06.21	料号 81-116-00022-1
.XXX, ±0.15				图号 E81170214 01-C
单位 mm	比例 1:1			
A4	页次 1 of 2			

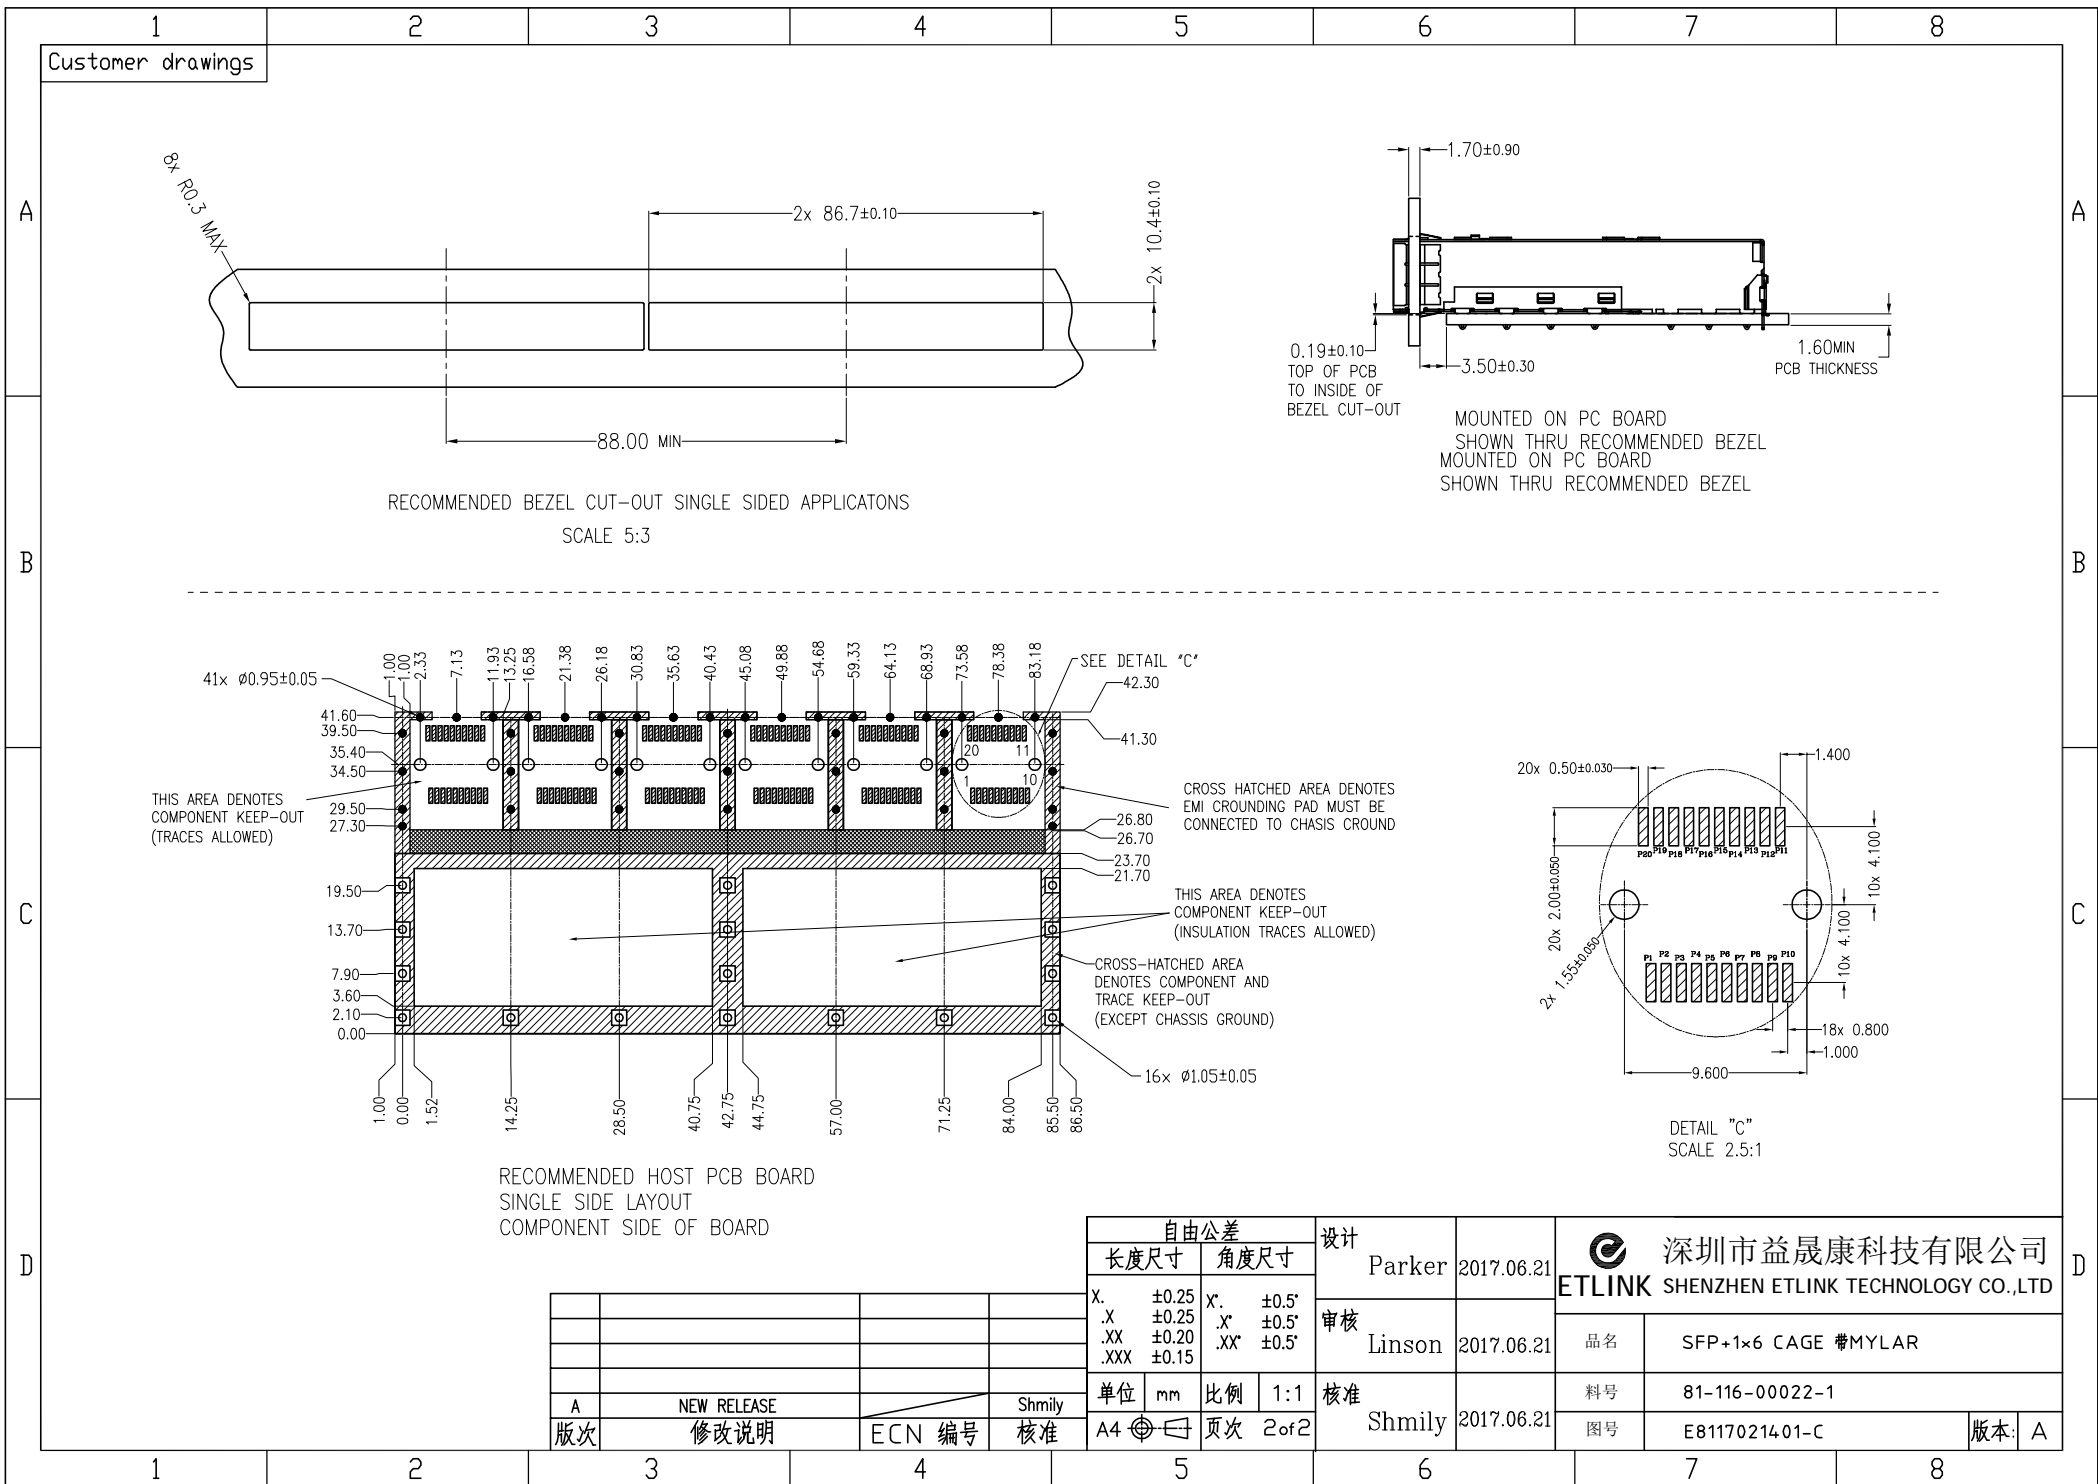

自由公差				设计	Parker	2017.06.21
长度尺寸	角度尺寸					
X.	±0.25	X'	±0.5'	审核	Linson	2017.06.21
.X	±0.25	.X'	±0.5'			
.XX	±0.20	.XX'	±0.5'			
.XXX	±0.15					
单位	mm	比例	1:1	核准	Shmily	2017.06.21
A4	⊕	页次	2 of 2			

深圳市益晟康科技有限公司 ETLINK SHENZHEN ETLINK TECHNOLOGY CO.,LTD		品名	SFP+1x6 CAGE 带MYLAR	
		料号	81-116-00022-1	
图号	E81170214-01-C		版本	A

NEW RELEASE	Shmily
修改说明	核准
ECN 编号	